
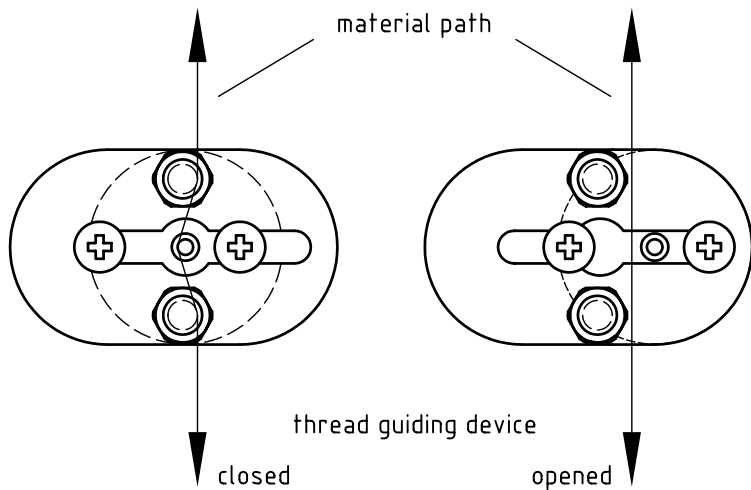
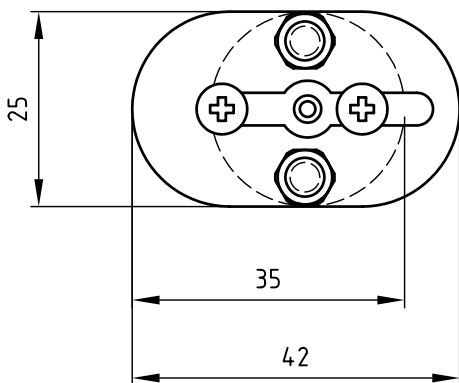
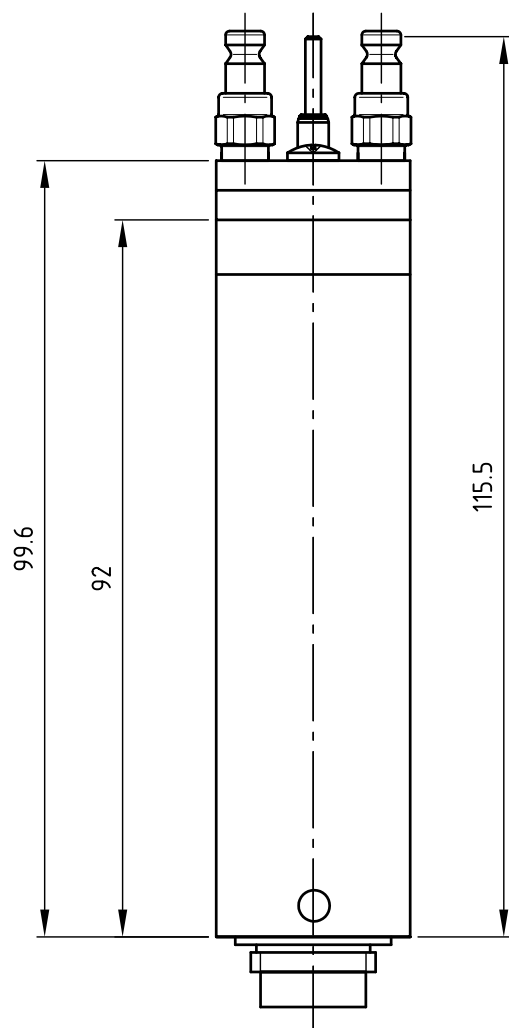



wrench width 7
 shiftable thread guiding device FFA

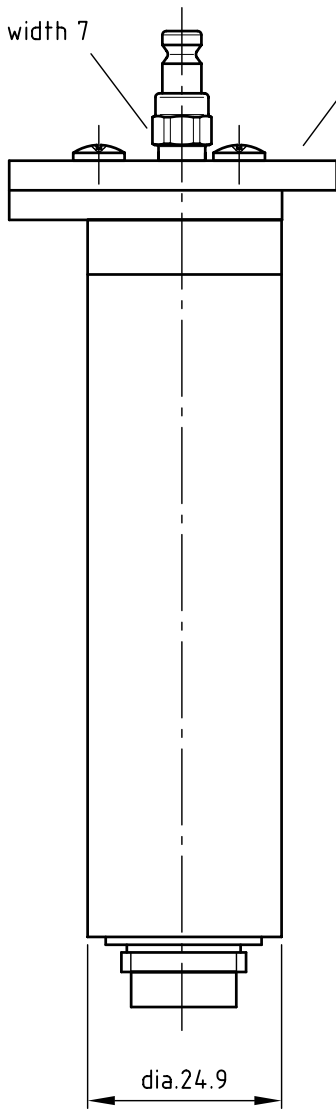

Types of thread guides:

- polished surface, e.g. for texturized yarns
- structured surface / matt finished, esp. for flat yarns

dimensions (mm)
 weight: approx. 100g

| | | | | | | |
|---------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------|-----------------|-----------------------|
| Schutzvermerk nach DIN 34 beachten | | Allgemein- toleranz DIN 7168-f | Pr.Nr. | Maßstab 1:1 /A4 | Mod.: 125.12 | |
| | | | | Werkstoff | | |
| | | Datum | Name | Tension sensor 125.12 with shiftable thread guiding device FFA | | |
| | | Erst. 10.05.05 | ch | | | |
| | | Gepr. | | | | |
| | | Norm | | | | |
| | | I.St. 02.08.05 | ch | Z.-Nr.: K651932 | | |
| | |  Honigmann GmbH Industrielle Elektronik 42289 Wuppertal | | | | Blatt 1 v. 1Bl. |
| Zust. | Änderung | Datum | Name | Urspr. | Ers. für Z.Nr.: | ers. durch Z.Nr.: |