


SK 224 FM

Radial force measuring axle

Scale drawing

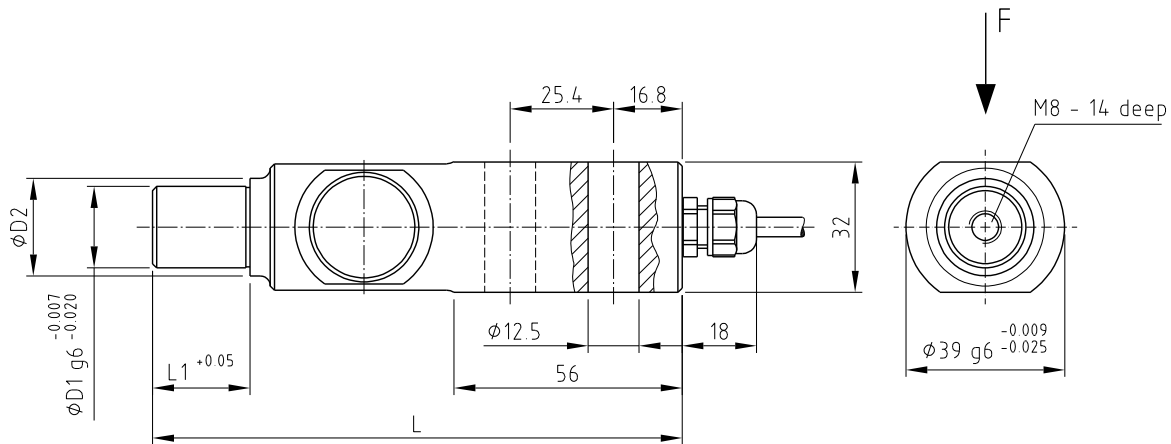

67224007

All dimensions in mm

Rated measuring ranges

Nominal force [kN]					Bearing journal ϕ [mm]		
5**	7,5	10	15***		20	25 *	

The measuring range of the sensor begins at force's zero point.

* Preferred construction size

** Special type LR (Low Range)

*** Special type HR (High Range)

Dimensions and weights

Bearing journal ϕ [mm]	Dimensions [mm]				Weight [g]
	D1	L1	D2	L	
20		23,9	24	130	800
25	*	28,9	28	135	850

* Preferred construction size

Order code

SK 224 FM - 10 - 20 - 3 - O	
Sensor type	
Nominal force [kN]	
Bearing journal ϕ [mm]	
Cable length [m]	Standard: 3 Option: required length
Cable connection	Standard: O (open ends) Option: S (connector)


Scope of supply

Sensor with connection cable

Technical data

Rated measuring ranges (F_N)	kN	0 to 5 / 0 to 7,5 / 0 to 10 / 0 to 15
Rated output	mV/V	1 to 2
Rated output tolerance	%	$< \pm 0,1$
Accuracy class		0,3
Excitation voltage max.	V	12
Reference excitation voltage	V	10
Input resistance	Ω	1000 ± 4
Output resistance	Ω	1000 ± 2
Isolation resistance	GΩ	> 5
Rated temperature range	$^{\circ}\text{C}$	-10 to 50, Option: -10 to 70
Operational temperature range	$^{\circ}\text{C}$	-10 to 70
Storage temperature range	$^{\circ}\text{C}$	-30 to 80
Reference temperature	$^{\circ}\text{C}$	23
Temperature influence per 10 K		
- on the zero point (TK0)	% F_N	$< \pm 0,1$
- on the calibration (TKC)	% F_N	$< \pm 0,15$
Creep after 30 minutes	% F_N	$< \pm 0,05$
Max. load	% F_N	approx. 150
Ultimate side load	% F_N	100
Deflection at nominal force	mm	$0,07 \pm 20 \%$
Typ. natural frequency of the sensor	kHz	> 2 (depending on the nominal force)
Connection cable		3m long, flexible, shielded 4 x 0,25mm ² , total- \varnothing 5,5 mm
Sensor housing		stainless steel
Protection class		IP 67

Connections

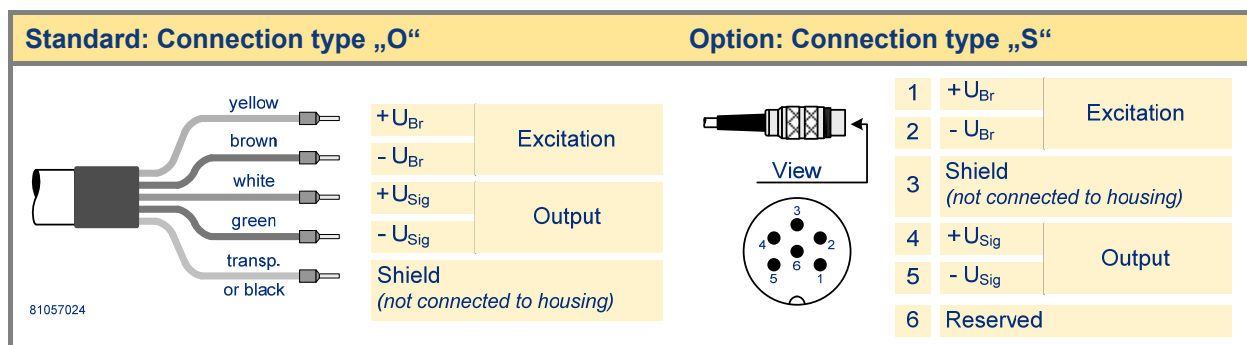

Technical design subject to change without prior notice. © 2021 by Honigmann

Honigmann Industrielle Elektronik GmbH • In den Weiden 20 • D-58285 Gevelsberg • ☎ +49-2332-55115-0 • 📠 +49-2332-55115-99