

**THIN FILM POROSITY TESTING****Complies with the requirements of**

AS3894.1-2002 (Wet Sponge Testing); ASTM G62-07; ASTM G6-07; NACE RP0274-2004; NACE SP0188-2006

**Features**

- LED display of voltage
- Internally mounted 9v battery
- Low battery condition LED indicator
- Audible and visual fault alarms
- Telescopic handle for user comfort (extends to 1.2m)
- Large probe head (230 x 40mm) and wider sponge gives faster tests
- Earphone jack to allow testing in noisy

**Application**

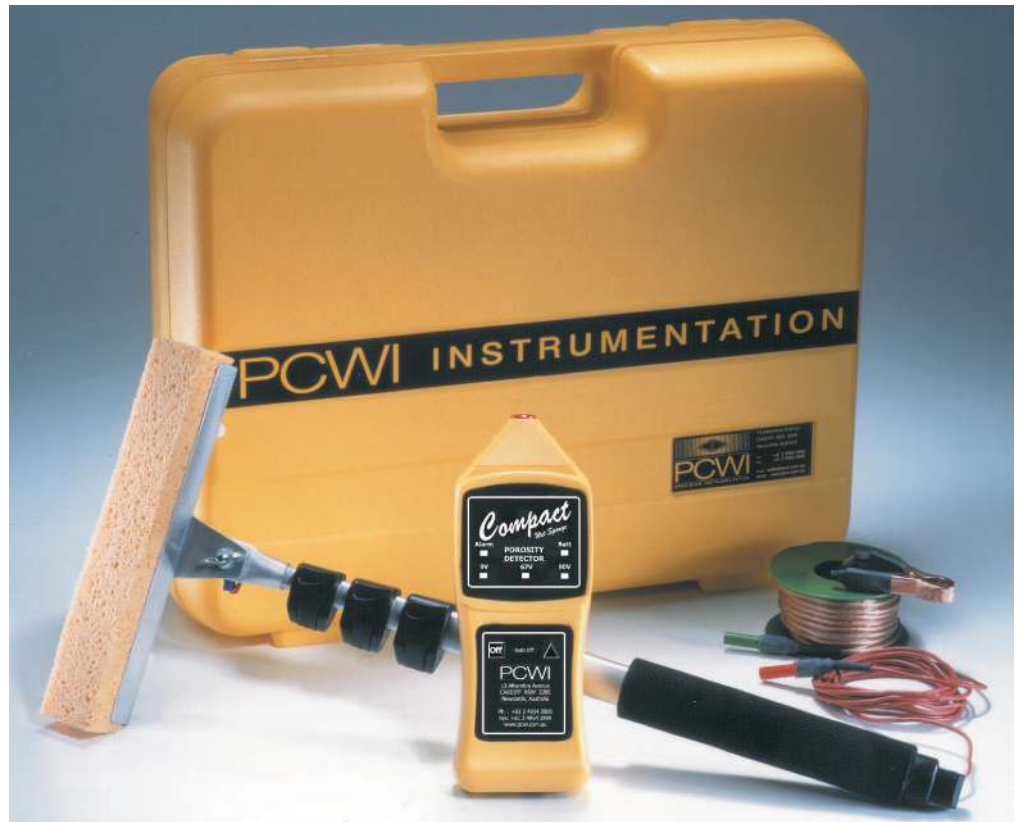
- Uses the wet sponge method to detect pinholes in coatings

**Models**

- Selectable 9; 67.5 or 90v test voltage

***We highly recommend that coatings over 150µm, or coatings in corrosive environments, be high voltage porosity tested.***

Made in **AUSTRALIA**

**Specifications**

Range:	0 to 500µm
Operating temperature:	0 to +50°C
Test Voltage:	9, 67.5 and 90V
Telescopic Probe length:	350mm to 1.2m
Power supply:	9v Battery
Dimensions:	210 x 75 x 35mm
Weight:	350g

**Kit comprises**

- Unit and Handle including Sponge
- Belt/pocket clip
- Seven metre earth lead and clip
- Carry case
- Instruction manual with Calibration certificate

Visit us on the World Wide Web at [www.checkline.com](http://www.checkline.com)

**ELECTROMATIC** Equipment Co., Inc., 600 Oakland Ave., Cedarhurst, NY 11516 – USA  
Tel: 800-645-4330 (USA & Canada) ■ Tel: (516) 295-4300 ■ Fax: (516) 295-4399