


Paper / Board

humimeter RH5 & RH6

Paper moisture meters for paper piles Also ideal for automatically monitoring the climate of printing rooms and paper stockrooms

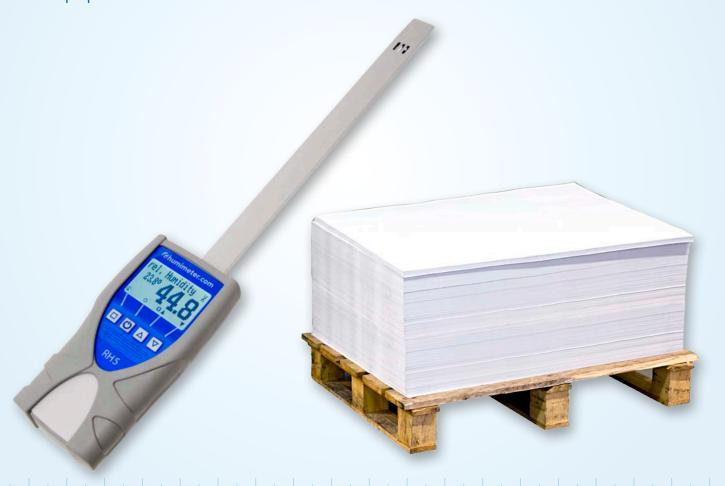

3,0°F | 6,16%| 456kg/m³| −27,3td| 0,64aw| 51,9%r.H.| 14,8%abs| 100,4g/m²| 09m/s| 4,90Ugl| 163ym| 23,2°C| 78,8°F| 6,21% |424 kg

Paper / Board

humimeter RH5

Paper moisture meter for relative moisture

humimeter RH6

Paper moisture meter for relative and absolute moisture, temperature compensated paper and wood equilibrium moisture content, calibration curves for determination of water content





Measuring procedure:

To determine the moisture in paper piles, the sword sensor is inserted into the paper stack and left there for a short conditioning time. The large, well-lit display shows the current moisture and temperature value. Via the integrated datalogger the measuring values can be stored and additional data can be added. The Autolog function enables an automatic saving of measuring values in adjustable time intervals. To prevent a damage of the sword sensor in heavy paper stacks, a sword sensor holder and a tool for removing the sword sensor holder are available optionally. The humimeter USB data interface module offers the possibility to connect the device to a PC. Via the delivered LogMemorizer software the measuring values can be read off the device, addition information can be added, and the data can be archived, exported and processed.

Features: humimeter RH5

- Relative air humidity 0 to 100%, resolution 0.1% RH
- Calibration 10 to 90% +/-1.5% RH (at 25°C)
- Temperature can be set to °C or °F as required
- Temperature -10 to +60°C/14 to 140°F, resolution 0.1°C
- Calibration +/-0.3°C (at 25°C)
- Dew point -55 to +60°C/-67 to 140°F, resolution 0.1°C
- Hold function, manual saving of results
- Automatic datalog for up to 10,000 logs with measuring point report
- Rapid adjustment
- Scope of supply: *humimeter* RH5 with rubber protection cover, wooden case and batteries

humimeter RH6

Additional functions:

- Absolute air humidity 0 to 130 g/m³, resolution 0.1g/m³
- Temperature compensated paper and wood equilibrium moisture content, calibration curves for determination of water content
- Customer calibration function
- Scope of supply: humimeter RH6 with rubber protection cover, humimeter USB data interface module with Log-Memorizer measuring data recording and analysing software on USB flash drive incl. USB cable for PC, wooden case and batteries















Climate / Environment

Foods

Bioenergy

Material

Buildings

Paper / Board



Checkline • 600 Oakland Ave, Cedahurst NY 11516 - USA www.Checkline.com • info@checkline.com • 516-295-4300