

**KTC**

# Digital Torque Screwdrivers

**LED & Audible Alerts at 90% of Target Torque!**

## GLK Series: 60, 250, 500 cN-m capacities

- Rugged, high quality production tools
- High accuracy  $\pm 1.5\%$  F.S. both CW and CCW directions
- Selectable units, ozf-in, lbf-in, cN-m
- Peak, peak with auto zero reset and Real Time modes
- Five programmable torque presets ideal for frequent operations.
- Pass/Fail mode counts fasteners tightened within programmed High/Low limits, using LED and audible alerts
- ISO-6789 Compliant
- Kit includes screwdriver with 1/4" square drive, 1/4" square drive to 1/4" hex magnetic adapter, Phillips tip, battery, carrying case and calibration certificate traceable to NIST
- Optional ratchet with 1/4" square drive, CW, CCW and fixed operation available

GLK Digital Torque Screwdrivers are compact, lightweight, and feature, LED and audible alarms, ergonomic handle, push button controls, and are battery powered.

Measure torque in peak or real time modes. Auto zero mode resets peak measurements automatically (1~10 seconds). Selectable units of ozf-in, lbf-in, and cN-m.

Five programmable torque presets stored in memory enable the user to check frequently used values. The presets alert the user with an intermittent signal at 90% and a continuous signal at 100% of the preset torque value using LED and audible indicators which enable users to tighten to within 10% of a preset torque value.

Pass/Fail mode counts the number of fasteners tightened within programmed high and low torque limits.

Specifications	
<b>Accuracy</b>	$\pm 1.5\%$ F.S.
<b>Measuring direction</b>	CW and CCW
<b>Measuring unit</b>	Selectable ozf-in, lbf-in, cN-m
<b>Data Memory</b>	5 Go/No Go torque presets, 1 Pass/Fail counter
<b>Auto Shut OFF</b>	Auto shut off after selectable interval of non-use (1~10 min.)
<b>Battery</b>	Lithium coin battery Panasonic CR2354
<b>Battery Life</b>	Approx. 2 months (100 usages per day)

Digital Torque Screwdriver			
Model No.	ozf-in	lbf-in	cN-m
GLK060E	0.9~85.0	0.05~5.31	0.60~60.00
GLK250E	3.5~354.0	0.22~22.13	2.5~250.0
GLK500E	7.1~708.0	0.44~44.25	5.0~500.0

**Selection Guideline:** The actual working torque value should fall within 70% of the torque measuring range.  
Note: cN-m is equivalent to N-cm

GLK250E  
GLK500E

GLK060E






**Large LED Lamp**  
The large LED lamp is easily visible even from the side.



GLK Kit

Optional 1/4" square drive ratchet with CW, CCW and fixed operation RA-50 Sold separately.

1/4" square to 1/4" hex magnetic adapter (included)  
Any 1/4" hex bits can be used.

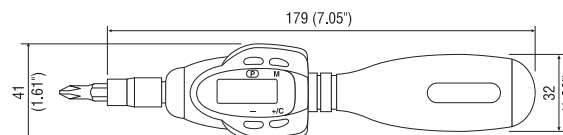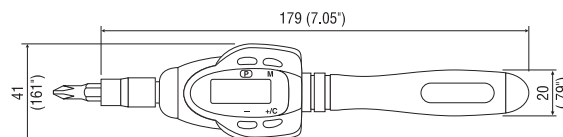

Specifications subject to change without notice.

**CHECK•LINE®—PRECISION QUALITY CONTROL INSTRUMENTS**

**Electromatic Equipment Co., Inc.**  
600 Oakland Ave.  
Cedarhurst, NY 11516 —USA

**Tel:** (800) 645-4330 (USA & Canada)  
**Tel:** (516) 295-4300  
**Fax:** (516) 295-4399

**Email:** info@checkline.com  
**Website:** www.checkline.com

**For additional information or to place an order CALL TOLL FREE 1-800-645-4330**

Check•Line is a registered trademark of Electromatic Equipment Company Inc.