
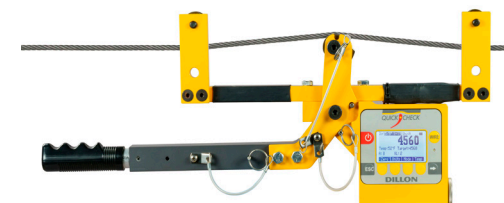


## Quick-Check Tension Meter Comparative Matrix

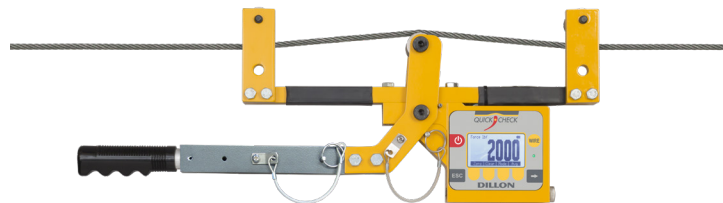

	CTM2 - Quick-Check 2000 lb	CTM2 - Quick-Check 10,000 lb	Quick Check-T
<b>Markets/Industries</b>	Tower and stack guy wires, cable barriers, overhead transit wires, bridges, fall arrest, stage support, aircraft cables and public utilities	Tower and stack guy wires, cable barriers, overhead transit wires, bridges, fall arrest, stage support, aircraft cables and public utilities	Custom designed for the cell tower industry
<b>Capacities</b>	2000 lb / 1000 kg	10,000 lb / 4500 kg	10,000 lb / 4500 kg
<b>Communications</b>	RS232	RS232	Bluetooth®
<b>Report Generation</b>	Excel via RS232	Excel via RS232	Utilize Bluetooth App to generate custom cell tower site report
<b>Image Capture</b>	No	No	Yes, via Bluetooth App
<b>Rope Calibrations</b>	Up to 20 (must be specified at time of order)	Up to 15 (must be specified at time of order)	Total of 20 wire calibrations with first being allocated to the calibration check rod
<b>Cable Diameter Range</b>	3/16" to 1" / 4.75 mm to 25.4 mm	3/16" to 1" / 4.75 mm to 25.4 mm	3/16" to 1" / 4.75mm to 25.4mm
<b>Display</b>	Informative Display: Shows: Unit, Wire Type, Sheave & Battery	Informative Display: Shows: Unit, Wire Type, Sheave & Battery	Bluetooth App and in-built display on device
<b>Date and Time</b>	Yes	Yes	Yes
<b>GPS</b>	No	No	Yes
<b>Calibration Reminder</b>	Yes	Yes	Yes
<b>AZT (Automatic Zero Tracking) &amp; Filtering</b>	Configurable AZT and Filtering	Configurable AZT and Filtering	Configurable AZT and Filtering
<b>Carry Case</b>	IP68 rugged carry case	IP68 rugged carry case	IP68 rugged carry case
<b>Enclosure</b>	Suitable for continuous outdoor use	Suitable for continuous outdoor use	Suitable for continuous outdoor use
<b>Units of Measure</b>	Lbf, kgf and Newtons	Lbf, kgf and Newtons	Lbf, kgf and Newtons
<b>Temperature Range</b>	-4° F to 158° F / -20° C to 70° C	-4° F to 140° F / -20° C to 60° C	-4° F to 140° F / -20° C to 60° C
<b>Backlight</b>	Yes (configurable intensity and timer)	Yes (configurable intensity and timer)	Yes (configurable intensity and timer)
<b>Power</b>	Two AA batteries	Two AA batteries	Two C batteries
<b>Battery Life*</b>	10Hz = over 250 hrs continuous 100Hz = over 100 hrs continuous	10Hz = over 250 hrs continuous 100Hz = over 100 hrs continuous	10Hz = over 250 hrs continuous 100Hz = over 100 hrs continuous
<b>Accuracy</b>	3% full scale	3% full scale	3% full scale
<b>User's Manual</b>	Yes, downloaded from website	Yes, downloaded from website	Yes, downloaded from website
<b>Pass/Fail Tensioning Mode</b>	Yes	Yes	Yes
<b>Tower Mode</b>	Stores wire rope readings to be exported later (Stores each Leg and Wire)	Stores wire rope readings to be exported later (Stores each Leg and Wire)	Generates target tension data and stores pre & post tension readings per anchor and leg. Compiled within the site report. Exported via email.
<b>Quick-Check Calibrated to most popular Cell Tower Guy Wires</b>	Yes	Yes	Yes
<b>Weight</b>	11 lb	11 lb	11 lb
<b>Warranty</b>	Two years	Two years	Two years