



# DT-300 SERIES

## Digital Tachometer Stroboscopes

- 100–30,000 RPM/FPM & higher with harmonics
- Highest accuracy and most stable flash rate
- Easy-to-read LED display
- Easy-to-operate controls
- Detachable pistol-grip handle
- Provides 12 V DC power for external sensors
- Accepts external trigger input and provides synchronizing pulse output
- Phase shift for best view and flash photography
- Coarse and Fine flash rate control
- Instant double and half-rate flash selection for error-free reading



### DT-311A

115 V AC or 230 V AC


### DT-315A

Internal battery, 12 V DC or AC adapter

### DT-315AEB

External battery pack or 12 V DC

Check•Line DT-300 Series Digital Tachometer Stroboscopes are portable, highly stable and accurate, industrial-quality tools for non-contact RPM measurement, inspection and observation of moving parts by “freezing” or “slowing down” the action.

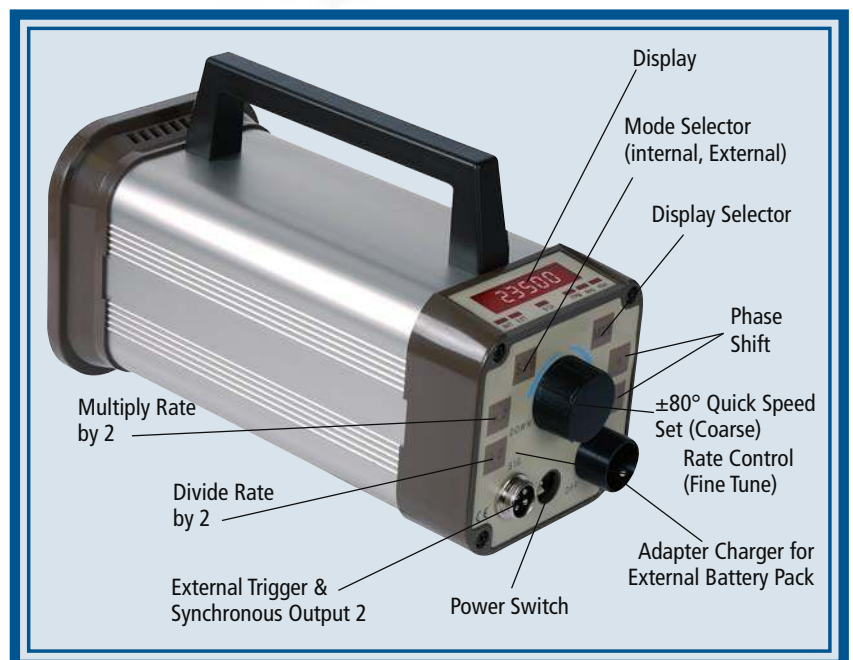

# Specifications

<b>Flash Range</b>	100–30,000 FPM	<b>Display</b>	5 digits, 10 mm high, red LED
<b>Accuracy</b>		<b>Flashtube</b>	Xenon, 10 W maximum
Internal Mode:	+ 0.01% of reading	<b>Flash Duration</b>	10–30 $\mu$ s
External mode:	+ 0.01% or + 1 digit	<b>Sensor Power Supply</b>	12 V DC + 0.6 V, 40 mA
<b>Drift</b>	+ 0.01% per degree C	<hr/>	
<b>Update Time</b>		<b>EXTERNAL MODE ONLY</b>	
Internal Mode	0.2 seconds	<b>Phase Shift:</b>	0–359° with 1° resolution or 0–333 ms from 200–3,000 FPM
External Mode	1 second	<b>Input Signal Req'd for External Triggering:</b>	5–24 V P–P (not to exceed 35 V to GND), pulse width 50 $\mu$ s minimum, rise time less than 0.2 ms
<b>Decimal Point</b>	100.0–1,999.9 and 2,000– 30,000	<b>Input Impedance</b>	10,000 ohms
<b>Output Signal</b>	Synchronous, 400 $\mu$ s pulse, 0 to approx. +12 V DC, 1000 ohms impedance		
<b>Display &amp; Rate</b>	Divide or multiply by 2, selectable		
<b>Low Battery Indicator</b>	Display shows L's		
<b>Operating Temperature</b>	32–104° F (0–40° C)		

## Model Power Requirements

<b>DT-311A</b>	115 V or 230 VAC (specify), 50/60 Hz, 30 VA
<b>DT-315A</b>	115 VAC or 230 VAC Adapter or one (1) hour, internal, rechargeable 12 V battery or external 12 VDC
<b>DT-315AEB</b>	Three (3) hour, external, rechargeable 12 V DC Power Pack or external 12 V DC

Model	Accessories	Battery Usage	Battery Charge	Dimension	Weight
<b>DT-311A</b>	none	N/A	N/A	4.7 x 4.7 x 7.2" (120 x 120 x 183 mm)	2.6 lbs. (1.2 kg)
<b>DT-315A</b>	Internal battery, 12 VDC with 115 VAC or 230 VAC AC Adapter Charger	1 hour at high flash rate	16 hours	4.7 x 5.6 x 9.7" (120 x 141 x 248 mm)	4.4 lbs. (2kg)
<b>DT-315AEB</b>	External battery pack, 12 V DC, with 115 V AC or 230 V AC Charger & carrying case	3 hours at high flash rate	16 hours	Same as DT-311A	4.5 lbs. (2 kg)

## External Battery Pack

<b>DT-3115AEB only</b>	6.3 x 4.3 x 2.8" (161 x 110 x 71 mm)	4.5 lbs. (2 kg)
------------------------	--------------------------------------	-----------------

Specifications subject to change without notice.

## CHECK•LINE®—PRECISION QUALITY CONTROL INSTRUMENTS

**Electromatic Equipment Co., Inc.**  
600 Oakland Ave.  
Cedarhurst, NY 11516 —USA

**Tel:** (800) 645-4330 (USA & Canada)  
**Tel:** (516) 295-4300  
**Fax:** (516) 295-4399

**Email:** info@checkline.com  
**Website:** www.checkline.com

**For additional information or to place an order CALL TOLL FREE 1-800-645-4330**

Check•Line is a registered trademark of Electromatic Equipment Company Inc.